

THREE DIVER PORTABLE PANEL WITH THREE DIVER RADIO SY-3DAP-D040-R-SF / BF




PART NO : SY-3DAP-D040-R

Three diver panel with radio




THREE DIVER PORTABLE PANEL WITH THREE DIVER RADIO SY-3DAP-D040-R-SF / BF

DIVING PANEL WITH D1/D2/D3 INLET FITTINGS (AIR SUPPLIES HP/LP) ON LEFT SIDE AND D1/D2/D3 OUTLET FITTINGS (TO DIVER) ON RIGHT SIDE

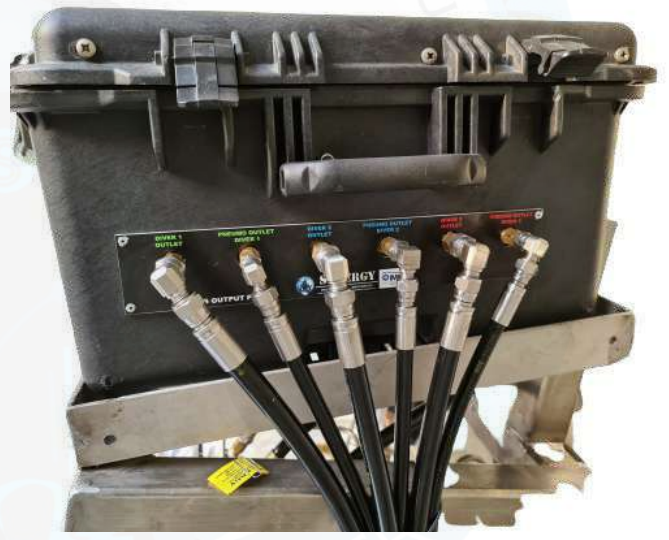


DIVING PANEL WITH D1/D2/D3 INLET (HP/LP) AND OUTLET FITTINGS (TO DIVER) FROM THE BACKSIDE OF THE PANEL

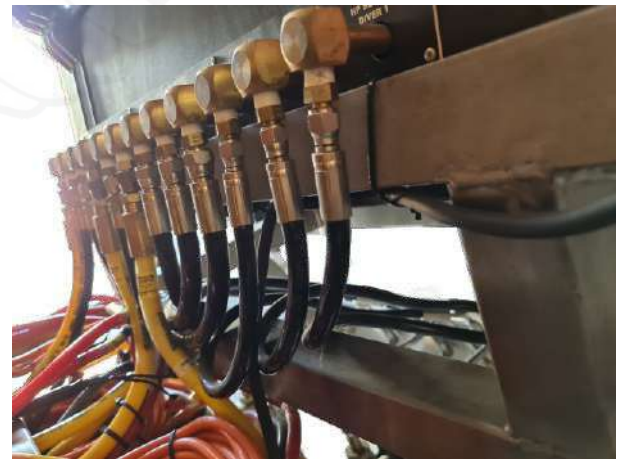


THREE DIVER PORTABLE PANEL WITH THREE DIVER RADIO SY-3DAP-D040-R-SF / BF

Information Two Diver Panel

Case	Model 1650, Black, Interior (28.57" L x 17.52" W x 10.65" H), with wheels and handle, water, rust and dust proof), Pelican USA Exterior dimensions: 80.14 x 52.1 x 31.67cm (31.55" x 20.51" x 12.47") Interior dimensions: 72.16 x 44.2 x 27.03cm (28.41" x 17.40" x 10.64") Weight without foam: 10.9kg (24.03lbs)
------	---

1 x 0-230 fsw/70 msw Depth gauge, 3.5", 0.25 % accuracy, mirror scale, with calibration point, Diver 1, Color coded **Green** 


1 x 0-230 fsw/70 msw Depth gauge, 3.5", 0.25 % accuracy, mirror scale, with calibration point, Diver 2, Color coded **Blue** 

1 x 0-230 fsw/70 msw Depth gauge, 3.5", 0.25 % accuracy, mirror scale, with calibration point, Diver 3, Color coded **Red** 

Air Supplies	HP - 3 independent supplies, one per diver, LP - 3 independent supplies, one per diver
Communication	Amron 2820A-11 Three diver radio with ac/dc power supply
Regulator	1 x per diver, suitable for breathing air, Inlet : 6000 psi, outlet : 400 psi
Relief valves	0-250 psi on regulated diver supply line, 100 psi on pneumo gauges

Air supply ports:

Option 1 - SF	All fittings provided on both sides of case - Left side all inlet fittings for hp air, lp air, right side divers air supply and pneumo fittings.
Option 2 - BF	All fittings provided from behind the panel for inlets and outlets
Calibration	Inbuilt calibration points for pneumo gauges

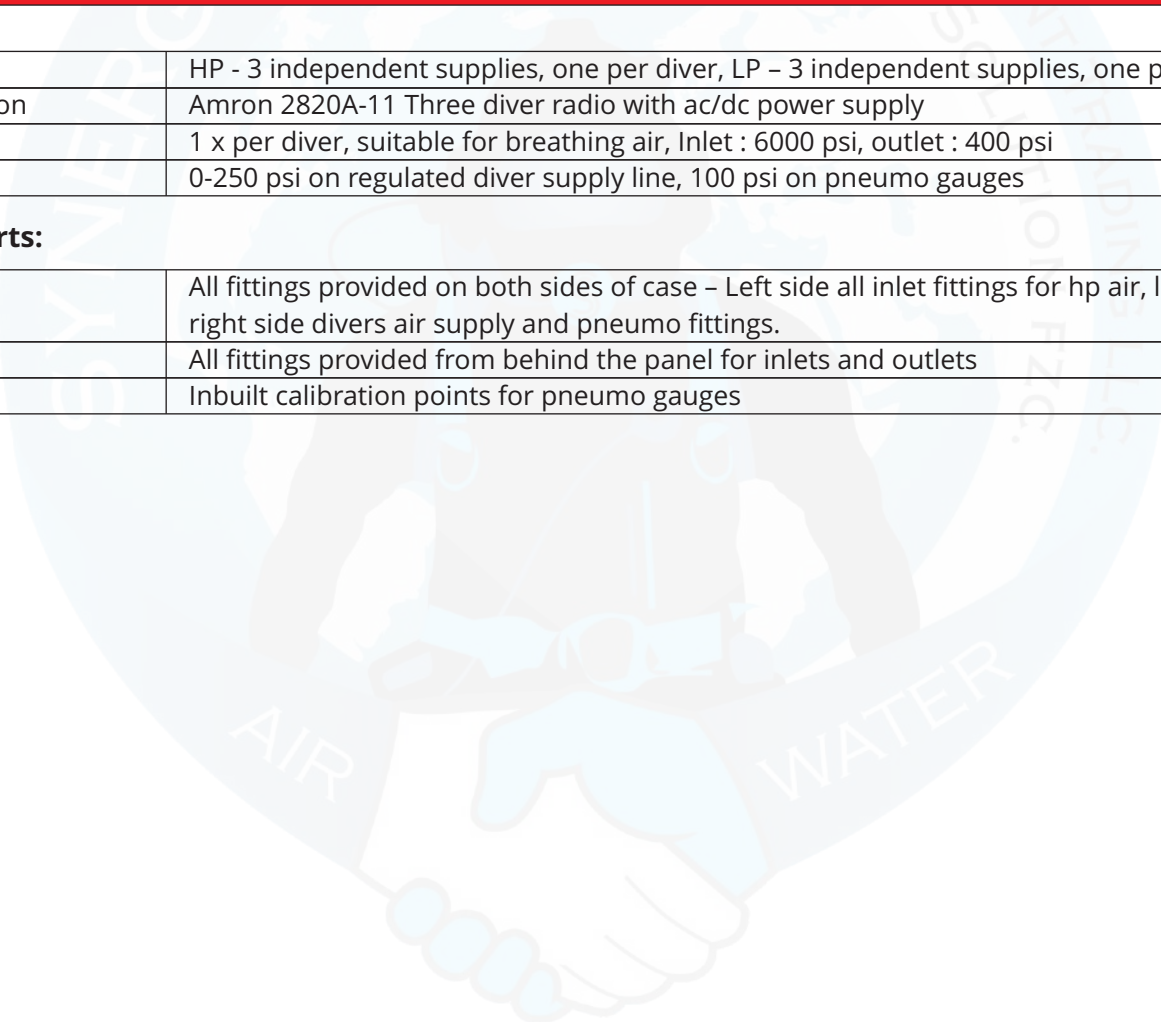

SY-2830A-11 AMCOM III THREE-DIVER RECHARGEABLE BASIC PORTABLE COMMUNICATOR

SY-2830A-11 AMCOM III THREE-DIVER RECHARGEABLE PORTABLE COMMUNICATOR WITH OUTDOOR AC POWER MODULE AND INTERNATIONAL LOCKING POWER CORD



NEWLY DESIGNED ENHANCEMENTS:

High Audio Fidelity

Ultra-low noise circuit combined with noise suppression circuitry produces crystal clear speech. Automatic gain adjustment

will guard audio signal from distortion, enhance speaker protection and audio quality. Increases band width 47%.

Extended Battery Operation Time

Audio amplifier card deploys the state-of-the-art Class-D digital audio power amplifier. Has very low power dissipation, produces less heat, and extends battery life up to 32%.

Flexible Gain Settings

The audio amplifier card has adjustable gain settings to accommodate different communication applications and environments.

Ultra-Low Electromagnetic Interference (EMI)

EMI is achieved through spread-spectrum and de-phase control techniques providing for optimum integration with diving systems.

Outdoor Rated AC Power Module

Weather resistant, IP65 rated AC power entry module accommodates country specific AC power cords.

Country Specific V-Lock AC Power Cord

At time of order, simply choose the IP54 rated Locking AC power cord you need.

FEATURES:

- Separate channels and volume controls for each diver and tender to accommodate individual earphone and microphone adjustments, equipment variations and individual comfort levels.
- Divers' umbilicals can be set to 4-wire mode (full duplex) or 2-wire mode (push-to-talk) or any combination of the two modes for any diver.
- Ability to use both dynamic and pre-amplified diver microphones with a unique circuit that detects microphone type and automatically adjusts volume levels.
- Weatherproof push-to-talk microphone for better voice intelligibility topside. For optimum clarity, see Tech Note (below) for other recommended equipment.
- Internal charger allows for simultaneous charging and operation of the unit while protecting the rechargeable battery from being over-charged. Automatically supplies power to the audio amplifier when AC power is disconnected to allow for continued operation.

SY-2830A-11 AMCOM III THREE-DIVER RECHARGEABLE BASIC PORTABLE COMMUNICATOR

SPECIFICATIONS:

- Input Impedance (Each Input): 250 Ohms
- Frequency Response: 300 - 10000 Hz
- Common Mode Rejection: 40 dB Minimum
- Current Drain Maximum Full Volume: 3 Amps
- Minimum Quiescent: 0.190 Amps
- Output Impedance: 4 Ohm
- Power Supply Voltage: 12 VDC Nominal (9 Volts Minimum - 16 Volts Maximum)
- AC Power Operating Range: 90-264 VAC, 50-60 Hz
- Sensitivity (Input): 0.5 mV
- Output Power (RMS @ 4 Ohm Load, 12 VDC): 10 Watts Audio
- Battery Life: 41 hours
- Dimensions: 10 in. H x 9 in. W x 14.5 in. L (25.4 cm x 22.9 cm x 36.8 cm)
- Weight: 17.05 Lbs. (7.73 Kg)

INCLUDED WITH COMMUNICATOR:

SY-2830A-11 AMCOM III Two-Diver Rechargeable Basic Portable Communicator with Outdoor Power Module and International Locking Power Cord includes:

- (1) SY-2405-28 Amron Hand-Held Push-to-Talk Microphone
- (1) SY-2890-05 Amron 12 VDC Sealed Lead Acid Gel-Cell Rechargeable Battery with Slide terminals
- (1) SY-283XA-UM Amron Three-Diver Portable Communicator User Manual

AVAILABLE OPTIONS:

- SY-2460SM-28 Amron Single Muff Operator Headset with Boom Mic and Dual Banana Plugs
- SY-2401-28 Amron Deluxe Headset with Boom Mic
- SY-2822-28 Amron Remote Walk-and-Talk (4-wire mode)
- SY-2821-28 Amron Remote Walk-and-Talk (2-wire mode)

TECH NOTE:

All communicators will inherently transfer topside noise to the divers when the tender speaks directly into the communicator's panel speaker. To eliminate background noise at the surface, use the 2405-28 Push-to-Talk Microphone, included with this model. For optimum communications, we recommend purchasing the 2401-28 Deluxe Headset with Boom Mic, topside. For tender mobility, use the 2401-28 Deluxe Headset with Boom Mic along with the 2822-28 Remote Walk-and-Talk (4-wire mode) or the 2821-28 Remote Walk-and-Talk (2-wire mode). For wireless tender communications, order the 2830A-03 Three-Diver Deluxe Portable Communicator with Wireless Tender.

SYNERGY SURFACE DIVING HOSES AND UMBILICALS SY-AQUAFLOW



Diving Umbilical with protective outer sheet



Diving Umbilical with spiral wrap



Diving Umbilical without protective outer sheet

CLASS WITNESS CERTIFICATES

Industry & Facilities Division
Inspection System
Third Party Inspection Report

1.0 - GENERAL INFORMATION

Client: SYNERGY INTERNATIONAL TRADING LLC
Product: THIRD PARTY INSPECTION SERVICE
Inspection Location: SYNERGY INTERNATIONAL TRADING LLC, DUBAI, UAE

2.0 - INSPECTION DETAILS

Inspection Report No: IMW0211111111111111
Inspection Date: 2024-01-01
Inspector Name: JOHN DOE
Inspector Title: SENIOR INSPECTOR

3.0 - INSPECTION RESULT

Inspection Status: **Pass**

Remarks: All items inspected are in compliance with the relevant standards and specifications.

Industry & Facilities Division
Inspection System
Third Party Inspection Report

4.0 - INSPECTION DETAILS

Inspection Report No: IMW0211111111111111
Inspection Date: 2024-01-01
Inspector Name: JOHN DOE
Inspector Title: SENIOR INSPECTOR

5.0 - REFERENCE DOCUMENTATION

Title	Reference No.	Revision	Approval Status	Approval By	Date
Inspection Report	IMW0211111111111111	01	Approved	John Doe	2024-01-01

6.0 - ATTACHMENTS

Attachments: Inspection Report, Photos, Videos, etc.

Industry & Facilities Division
Inspection System
Third Party Inspection Report

7.0 - INSPECTION DETAILS

Inspection Report No: IMW0211111111111111
Inspection Date: 2024-01-01
Inspector Name: JOHN DOE
Inspector Title: SENIOR INSPECTOR

8.0 - DETAILS OF INSPECTION

Inspection Details: Description of the inspected item, location, and conditions.

9.0 - DETAILS OF MONITORING AND SURVEILLANCE PLAN

Monitoring Plan: Details of the monitoring and surveillance plan for the inspected item.

Industry & Facilities Division
Inspection System
Third Party Inspection Report

10.0 - HEALTH, SAFETY & ENVIRONMENT COMMENTS

Health, Safety & Environment Comments: Details of any HSE observations.

11.0 - PERSONAL HEALTH

Personal Health: Details of the inspector's health status.

Industry & Facilities Division
Inspection System
Third Party Inspection Report

12.0 - NON-COMPLIANCE

No.	Category	Description	Level	Inspected On	Inspected By	Corrected On	Corrected By	Remarks
1	Minor	Labeling on equipment	Low	2024-01-01	John Doe	2024-01-01	John Doe	Corrected

13.0 - PUNCH LIST

No.	Item	Category	Description	Level	Inspected On	Inspected By	Corrected On	Corrected By	Remarks
1	Pressure Gauge	Minor	Pressure gauge reading	Low	2024-01-01	John Doe	2024-01-01	John Doe	Corrected

Industry & Facilities Division
Inspection System
Third Party Inspection Report

14.0 - DIGITAL PICTURES

Digital Pictures: Photos and videos of the inspected item.

15.0 - ATTACHMENTS

Attachments: Inspection Report, Photos, Videos, etc.

Certifications Provided with each panel

Manufacturer	Synergy certification
International	IMCA D040
Class	Bureau Veritas pressure test certificates
Warranty	1 year international manufacturer warranty
Weight	64 kg


THREE DIVER PORTABLE PANEL WITH THREE DIVER RADIO SY-3DAP-D040-R-SF / BF

ORDERING INFORMATION

Sr.	Part Number	Description
1	SY-3DAP-D040-R-SF	Portable three diver panel, offshore, imca with radio (no diver cctv), side inlet and outlet fittings
2	SY-3DAP-D040-R-BF	Portable three diver panel, offshore, imca with radio (no diver cctv), back inlet and outlet fittings


Sr.	Part Number	Description
1	SY-2830A-11	Amcom iii three-diver rechargeable basic portable communicator
2	SY-UDA-0204	4 core Umbilical air/gas, pneumo, communication and video cables
3	SY-UDA-0103	3 core Umbilical air/gas, pneumo, communication
4	SY-ORANGESHEATH	Full braided protective outer sheath (for complete protection of umbilicals)
5	SY-SPIRAL WRAP	Spiral wrap (in 10 mtr lengths) (for umbilical protection)
	Fittings as below	
6	SY-386-PB-AIR	3/8"x 6 jic phosphor bronze reusable umbilical air/gas hose end fitting
7	SY-144-PB-PNEUMO	1/4" x 4 jic phosphor bronze reusable umbilical pneumo end fitting
8	SY-RMG-3-FS	Marsh marine, 3 pin, Female, 18"
9	SY-BANPLUGS-TWIN	Twin banana plugs surface communication end fitting (Red/Black)

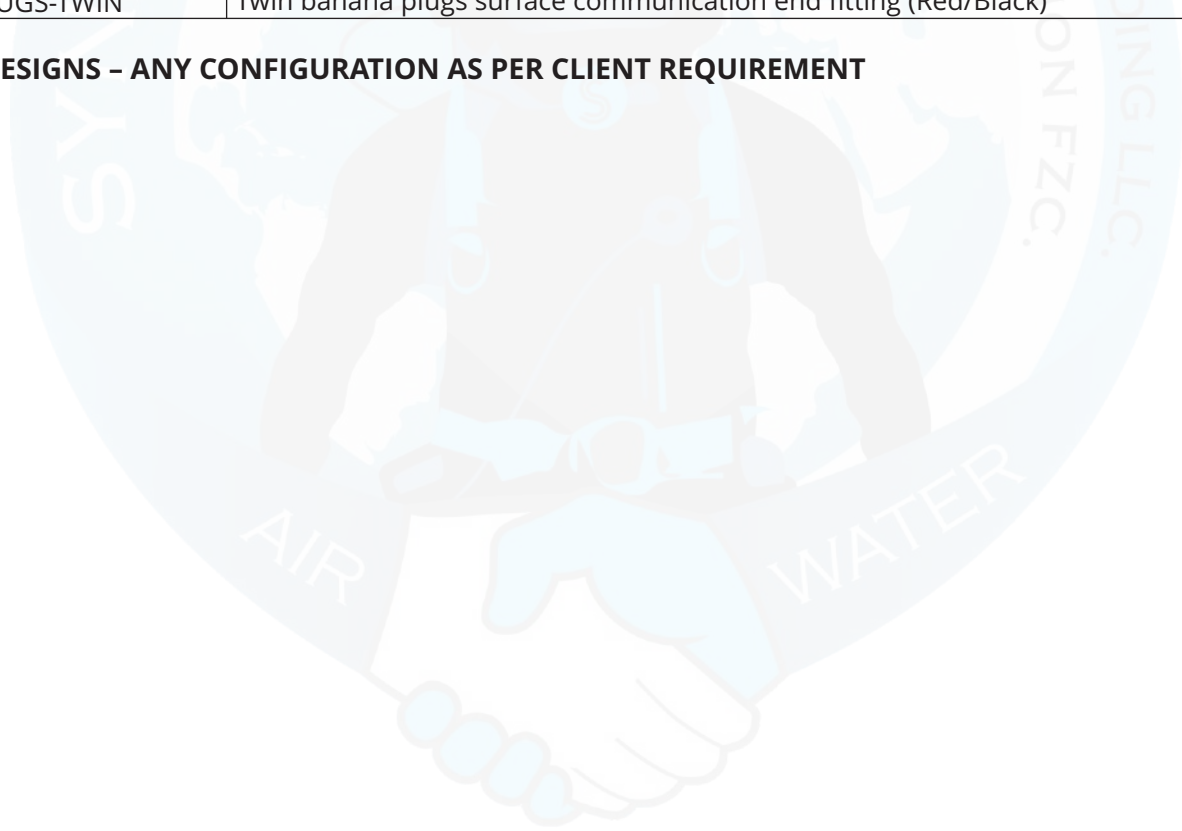

BESPOKE DESIGNS - ANY CONFIGURATION AS PER CLIENT REQUIREMENT







THREE DIVER PORTABLE PANEL WITH THREE DIVER RADIO SY-3DAP-D040-R-SF / BF



Contact us


 29th Street, Amman Road, Behind Al Huraiz Est. For Industry,
Al Qusais, Industrial Area – 1,
Dubai, United Arab Emirates


 Tel : 009714 2580533 

 Fax : 042516664 

 UAE : 00971505648178 

 UK : 00447951966260 

 Website : www.synergiequipment.com

 Email : ram@synergiequipment.com

 For Sale : info@synergiequipment.com

