



SYNERGY

INNOVATIVE DIVING EQUIPMENT TRADING LLC

INSPIRING • ENGINEERING • INNOVATION




ISO 45001:2018 OHSMS




SYNERGY DIESEL DIVER HOT WATER MACHINE (SY-DHWU-SB38S)


BELL SYNERGY # SY-DHWU-SB38S

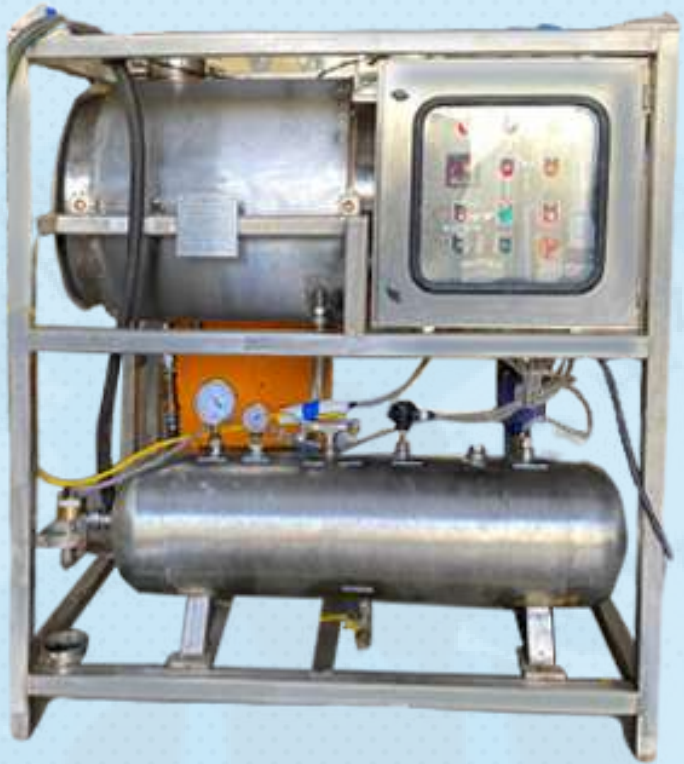

SYNERGY DIESEL DIVER HOT WATER MACHINE (SY-DHWU-SB38S)

BELL SYNERGY # SY-DHWU-SB38S

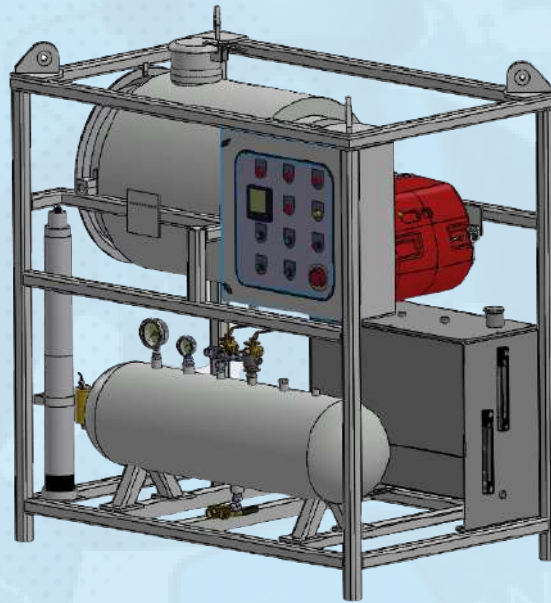



SYNERGY DIESEL DIVER HOT WATER MACHINE (SY-DHWU-SB38S)

Description:

The Model: DHWU-SB38S is one of the most reliable and rugged diesel fired divers hot water units available. Dhwu-sb38s can provide hot water for up to 2 divers down to 150msw. These units housed in a stainless steel frame. The unit comes with digital control panel in a stainless steel enclosure and a remote display and emergency shut-down panel that can be located in dive control. A stainless steel submersible pump is provided with the unit. The submersible connecting cables, sockets and hoses (20 meters) are part of the standard supply. The unit can be supplied with any power supply configuration optionally with multiple power configuration (ie. 110/220/440 v and 50/60 hz, & dual option)

| Sr. | Recommended usage |
|-----|---|
| 1 | Heating of air diver suit |
| 2 | Heating of Mix gas diver suit |
| 3 | Heating of Bell diving system |
| 4 | Backup or redundancy diver heating system |
| 5 | Backup or redundancy bell heating system |

| Sr | Specifications |
|----|---|
| 1 | Flow 30-40 lpm |
| 2 | Heating capacity-385,000 btu (Approx.) |
| 3 | Stainless steel heatingcoil assembly |
| 4 | Stainless steel submersible pump |
| 5 | Stainless steel coil wrap |
| 6 | Oil fired two-stage burner for better control |
| 7 | Burner cover |
| 8 | Fuel tank stainless steel 120 liters |
| 9 | 100 Liters mixing tank |
| 10 | 4 x lifting eyes & certified lifting sling |
| 11 | Dimensions: 1.5m x 1m x1.7m (lxBxh) |

| Sr. | Safety features |
|-----|--|
| 1 | Burner cover |
| 2 | Stainless steel double door electrical enclosure |
| 3 | Fuel pressure gauge |
| 4 | Electronic temperature controller 2 stage. |
| 5 | High temperature secondary thermostat |
| 6 | Low flow switch |
| 7 | High & low pressure switch |
| 8 | Remote temperature display and Emergency stop switch |
| 9 | Tank safety relief valve |

| | |
|-----------------------|--|
| Certifications | Provided with each hot water machine |
| International | IMCA D018 / D023 / D024 |
| Manufacturer | Production, testing and electrical certificates |
| Class | Bureau Veritas Lifting test certificates (including MPI) |
| Warranty | 12 month / 3000 hour standard warranty |

ORDERING INFORMATION

| Sr. | Part Number | Description |
|-----|----------------|--------------------------|
| 1 | SY-SB-DHWU-3SS | DIESEL HOT WATER MACHINE |



SYNERGY INFRASTRUCTURE





SYNERGY

INNOVATIVE DIVING EQUIPMENT TRADING LLC

INSPIRING • ENGINEERING • INNOVATION

UAE • UK












ISO 45001:2018 OHSMS






SYNERGY DIESEL DIVER HOT WATER MACHINE (SY-DHWU-SB38S)

Contact us

 P.O. Box – 237849, Warehouse No 8,
Al Maidoor Warehouse, Al Qusais,
Industrial Area - Dubai - UAE

 Tel : 009714 2580533 
 Fax : 009714 2580534 
 UAE : 00971505648178 
 UK : 00447951966260 

 Website : www.synergiequipment.com
 Email : ram@synergiequipment.com
 For Sale : info@synergiequipment.com

